
SEALKOTE®





Waterproof & Rust-proof Bituminous Coating

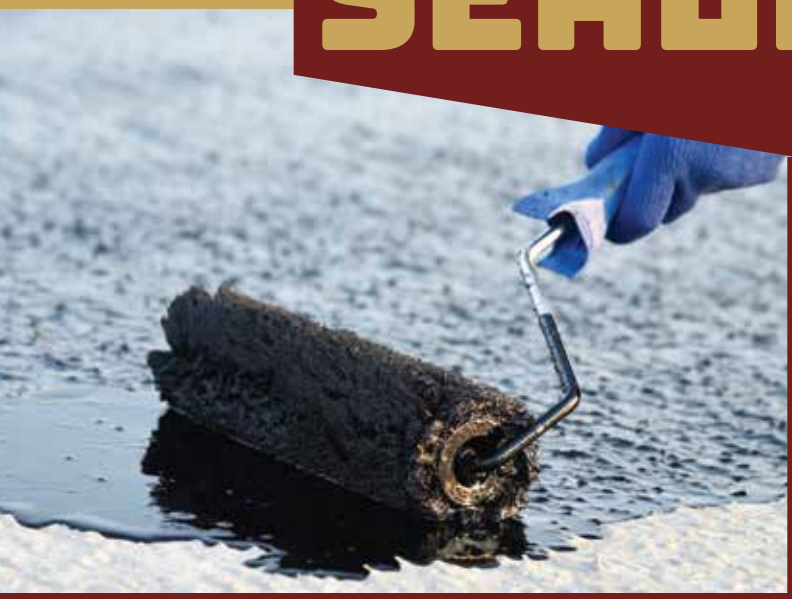

20 KG

Sealkote is a bitumen-based coating for waterproof & rust-proof.


Applications:

- Apply Sealkote to clean and dry surface.
- Surface with rust or coating layer that has peeled off must be cleaned.
- Sealkote can be applied using a brush or spray tool. Use kerosene or afdunner as a solvent.
- Apply the first layer until a thin film forms that covers the pores of the substrate.
- Once the surface dry, second coat can be applied.

Features:



WATERPROOF



EXCELLENT ROOT RESISTANCE




RUST-PROOF



MELT-PROOF



EASY TO APPLY



QUICK DRY



STRONG ADHESION

Parameter	Reference Method	Unit	Sealkote
Crack bridging	ASTM D 661 – 86 E1	mm	1,176
Adhesion to mortar	ASTM D4541	mpa	1,85
Water absorbption	ASTM D471	%	2,49
Water resistance in besek during 28 days of observation	Internal standard	-	Not blister and not leakage